





LOW VOLTAGE ENERGY STORAGE SYSTEM -UP5000

Vertical industry integration chain

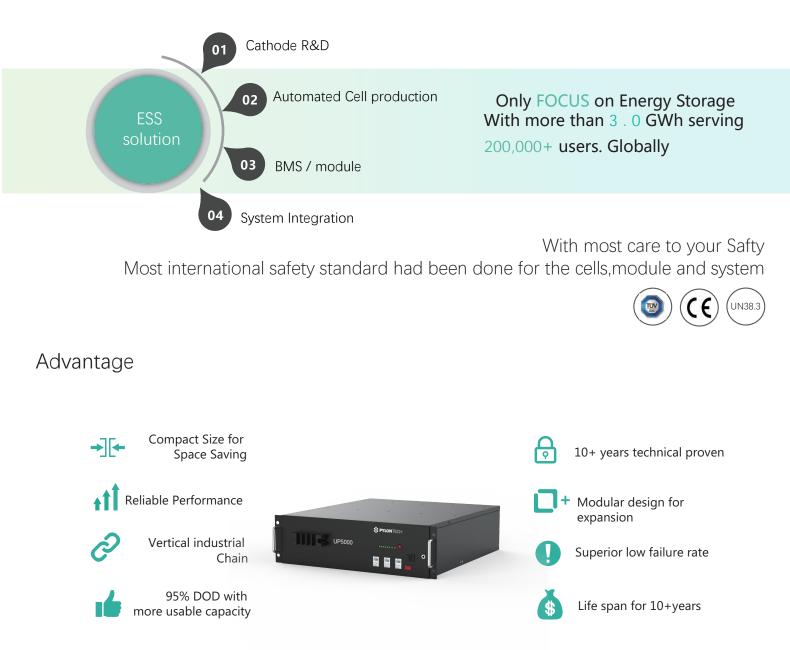

Why need battery storage system?

High-efficiency for your power distribution Cut and save your electricity bills

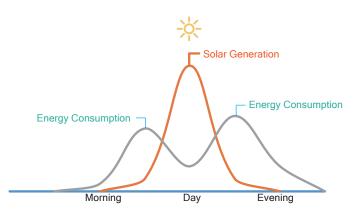



Electricity power occupies more than half of increasing energy consumption in this decade, DER (distributed energy resources) is crucial today during the COVID-19 pandemic while the conventional grid is less reliable because of the less manpower available.

Realize your grid Independence

Keep your grid avaible during terrible whether or extreme situation



Specification

:			•	
			UP5000	
		888		!

Specification	Basic Parameters	UP5000
Nominal	Nominal Voltage (V)	48
Nominai	Nominal Capacity (Wh)	4,800
	Ussable Capacity (Wh)	4,560
Dhundard	Dimension (mm)	442*420*165
Physical	Weight (Kg)	45
	Discharge Voltage (Vdc)	44.5
	Charge Voltage (Vdc)	52.5 ~ 53.5
Electrical		50 (Recommended)
	Charge / Discharge Current (Amps)	75 (Max)
		90 (Peak@15s)
	Communication Port	RS485,CAN
	Single string quantity(pcs)	16
	Working Temperature/℃	0~50 Charge
Others		-10~50 Discharge
	Shelf Temperature/°C	-20~60
	Altitude (M)	< 2000
	IP rating	IP20
	Humidity (RH)	5~95%
	Certification	IEC62619/CE/ UN38.3
	Design life	10+ Years (25°C/77°F)
	Cycle Life	>4,500 (25°C)

